


R05-A

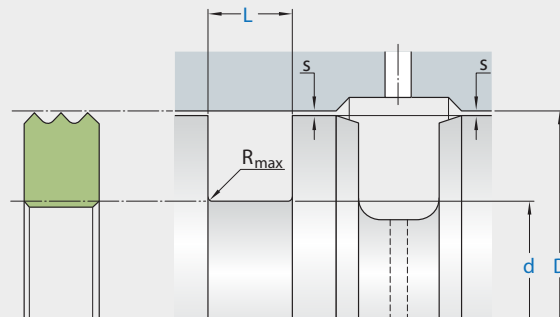

Ordering dimensions in blue

Surface roughness	R_{tmax}	R_a
Sliding surface	$\leq 2,5 \mu m$	$0,1-0,5 \mu m$
Bottom of groove	$\leq 6,3 \mu m$	$\leq 1,6 \mu m$
Groove face	$\leq 15 \mu m$	$\leq 3 \mu m$

Hardness: Min 45 HRC (55 HRC recommended), hardened depth $> 0,3 \text{ mm}$.
Bearing area: 50-95% and a cutting depth of $0,5 R_z$ based on $C_{ref} = 0\%$

Standard dimensions					
D^*		d	L	R_{max}	s
over	incl.	h8	+0,2		
mm					
13	30	D - 8	4,5	0,2	H9/e8
30	46	D - 10	5,6	0,2	H9/e8
46	68	D - 12	5,6	0,2	H9/e8
68	100	D - 15	7,7	0,2	H7/f7
100	160	D - 20	9,2	0,2	H7/f7
160	225	D - 25	11,3	0,2	H7/f7
225	330	D - 30	13,5	0,2	H7/f7
330		D - 40	18,5	0,2	H7/f7

application



not bolded symbols; please consult our technical for application limitations

* Tolerance area counter surface $\leq 68 \text{ mm} \dagger H9, > 68 \text{ mm} \dagger H7$

operating parameters & material

diameter range: up to 600 mm

material	temperature	max. surface speed	max. pressure ¹
ECOPUR	-30 °C ... +110 °C	0,2 m/s	160 bar (2300 psi)
H-ECOPUR	-20 °C ... +110 °C	0,2 m/s	160 bar (2300 psi)
S-ECOPUR	-20 °C ... +110 °C	0,3 m/s	160 bar (2300 psi)
T-ECOPUR	-50 °C ... +110 °C	0,2 m/s	160 bar (2300 psi)
G-ECOPUR	-30 °C ... +110 °C	0,2 m/s	160 bar (2300 psi)
Ecorubber 1	-30 °C ... +100 °C	0,2 m/s	100 bar (1400 psi)
Ecorubber H	-25 °C ... +150 °C	0,2 m/s	100 bar (1400 psi)
Ecorubber 2	-20 °C ... +200 °C	0,2 m/s	100 bar (1400 psi)
Ecorubber 3 ²	-50 °C ... +150 °C	0,2 m/s	100 bar (1400 psi)
Ecosil	-60 °C ... +200 °C	0,2 m/s	100 bar (1400 psi)

the stated operation conditions represent general indications. it is recommended not to use all maximum values simultaneously.
surface speed limits apply only to the presence of adequate lubrication film.

¹ pressure ratings are dependent on the size of the extrusion gap.

² Ecotal up to ø260 mm, Ecomid above ø260 mm.

surface quality

surface roughness	Rtmax (µm)	Ra (µm)
sliding surface	≤3	≤0,3
bottom of groove	≤10	≤1,8
groove face	≤16	≤3

tolerance recommendation

seal housing tolerances	
Ød	f7
ØD	H8