


S20-R

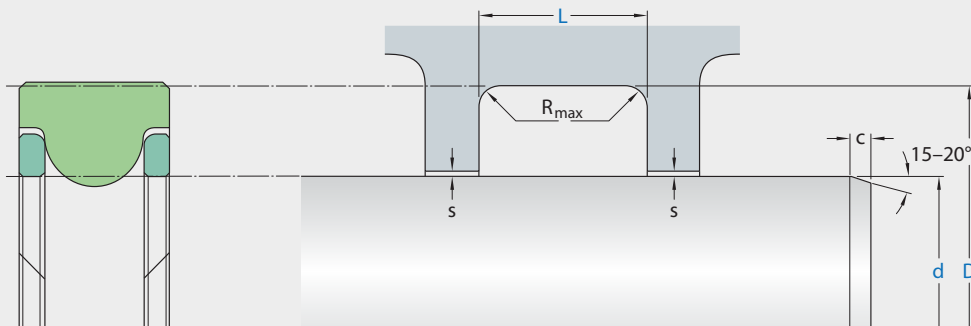

Ordering dimensions in blue

Surface roughness	R_{tmax}	R_a
Sliding surface	$\leq 2,5 \mu m$	$0,05-0,3 \mu m$
Bottom of groove	$\leq 6,3 \mu m$	$\leq 1,6 \mu m$
Groove face	$\leq 15 \mu m$	$\leq 3 \mu m$

Bearing area: 50–95% and a cutting depth of $0,5 R_z$, based on $C_{ref} = 0\%$

Standard dimensions

d	f8	static		D	L	R_{max}	c	s*
		over	incl.					
11	100	–	–	H10	+0,25			
100	150	11	20					
150	250	20	40					
mm								
250	400	40	100	$d + 4,36$	4,5	0,4	2,0	f8/H8
400	600	100	300	$d + 4,36$	6,5	0,4	2,0	f8/H8
600		300	600	$d + 6,00$	7,4	0,4	3,0	f8/H8
				$d + 9,06$	10,1	0,4	3,5	f8/H8
				$d + 11,88$	12,8	0,4	4,5	f8/H8
				$d + 17$	17,5	0,4	4,5	f8/H8

application



not bolded symbols; please consult our technical for application limitations

* Extrusion gap values shown above are valid for a temperature of 70 °C, higher temperatures require lower values.

operating parameters & material

diameter range: up to 600 mm

material		temperature	max. surface speed	max. pressure ¹	hydrolysis	dry running	wear resistance
sealing element	back-up ring						
Ecorubber 1	Ecotal/Ecomid ²	-30 °C ... +100 °C	0,5 m/s	700 bar (70 MPa)	-	-	O
Ecorubber H	Ecotal/Ecomid ²	-25 °C ... +100 °C	0,5 m/s	700 bar (70 MPa)	+	O	+
Ecorubber 2	Ecopaek	-20 °C ... +200 °C	0,5 m/s	700 bar (70 MPa)	-	-	O
Ecorubber 2	Ecoflon 2	-25 °C ... +200 °C	0,5 m/s	700 bar (70 MPa)	-	-	O
Ecorubber H	Ecopaek	-20 °C ... +150 °C	0,5 m/s	700 bar (70 MPa)	+	O	+
Ecorubber H	Ecoflon 2	-25 °C ... +150 °C	0,5 m/s	700 bar (70 MPa)	+	O	+

the stated operation conditions represent general indications. it is recommended not to use all maximum values simultaneously.

surface speed limits apply only to the presence of adequate lubrication film.

¹ pressure ratings are dependent on the size of the extrusion gap.

² Ecotal up to ø260 mm, Ecomid above ø260 mm.

++ ... particularly suitable

o ... conditional suitable

+ ... suitable

- ... not suitable

for detailed information regarding chemical resistance please refer to our „list of resistance“. for increased wear resistance and higher pressure range polyurethane materials are to be preferred, attention should be paid to restrictions in chemical and thermal resistance. for higher gliding speeds another sealing system should be used (e.g. PTFE materials).

note on special materials:

as the temperature limits are determined by POM, using special materials for the back up ring can expand the temperature limits.


mode of installation

for inside diameters of 25 mm or more, and dependant on the radial cross section (cs), the seal can be snapped into the housing.

Ød	type of installation
≤ 4•cs	open mounting space required
> 4•cs ≤ 6•cs	snap mounting with tool
> 6•cs	snap mounting by hand

at installation, pay attention that the radius on the backup elements fits to the corresponding radius on the sealing element (nonsymmetric backup elements).

recommended mounting space:

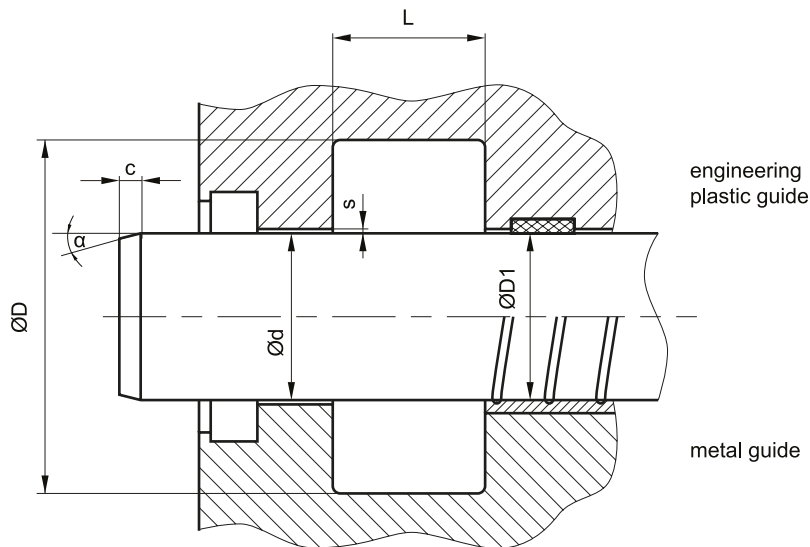

recommended guide tolerance D1:

d f8 [mm]	p ≤ 100 [bar]	100 < p ≤ 300 [bar]	p > 300 [bar]
≤ 100	H9	H8	H8
> 100 ≤ 200	H9	H8	H7
> 200	H9	H8	H7

standard tolerance range for piston rods is f8. If a tolerance range selection is possible f7 should be preferred.

insertion chamfer:

in order to avoid damage to the rod seal during installation, the piston rod is to be chamfered and rounded as shown in the "recommended mounting space" drawing. the size of chamfer depends on the seal type and profile width.

cs (mm)	c (mm)	
	$\alpha = 15^\circ \dots 20^\circ$	$\alpha = 20^\circ \dots 30^\circ$
(2)	2	1
(3)	3	1,5
4	3,5	2
5	4	2,5
6	4,5	3
7,5	5	4
10	6	5