


R01-F

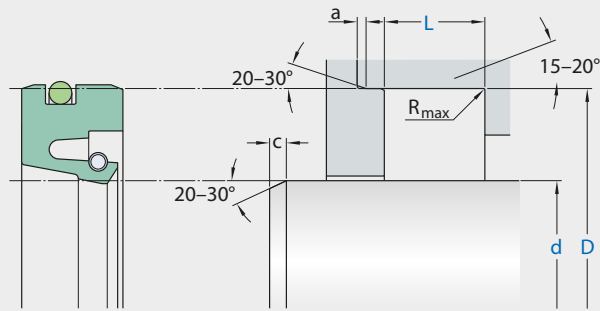


Ordering dimensions in blue

Surface roughness	R_{tmax}	R_a
Sliding surface	$\leq 2 \mu m$	0,05–0,3 μm
Bottom of groove	$\leq 6,3 \mu m$	$\leq 1,6 \mu m$
Groove face	$\leq 15 \mu m$	$\leq 3 \mu m$

Hardness: On the surface min 55 HRC, hardened depth > 0,3 mm.
 Bearing area: 50–95% and a cutting depth of 0,5 R_z based on $C_{ref} = 0\%$

Standard dimensions		d		D	L	c	a	R_{max}
d	h11	d	h11	H8	-0,1			
Rotating application	Pivoting application	over	incl.	over	incl.			
mm								
10	66	10	33	d + 12	7,0	3	1,25	0,4
66	110	33	55	d + 15	9,0	3,5	1,5	0,4
110	280	55	140	d + 20	10,0	5	2	0,4
280	400	140	200	d + 25	12,5	6,5	2,5	0,8
400	600	200	400	d + 30	15,0	7,5	3	0,8
		400	600	d + 40	20,0	9	3,5	0,8

application



operating parameters & material*diameter range: up to 600 mm*

material		temperature	max. surface speed	max. pressure ¹
glide ring	O-ring			
Ecoflon 2	Ecorubber 1	-30 °C ... +100 °C	10 m/s	15 bar (210 psi)
Ecoflon 2	Ecorubber 2	-20 °C ... +200 °C	10 m/s	15 bar (210 psi)
Ecoflon 3	Ecorubber 1	-30 °C ... +100 °C	10 m/s	15 bar (210 psi)
Ecoflon 3	Ecorubber 2	-20 °C ... +200 °C	10 m/s	15 bar (210 psi)
Ecoflon 4	Ecorubber 1	-30 °C ... +100 °C	10 m/s	15 bar (210 psi)
Ecoflon 4	Ecorubber 2	-20 °C ... +200 °C	10 m/s	15 bar (210 psi)

the stated operation conditions represent general indications. it is recommended not to use all maximum values simultaneously. surface speed limits apply only to the presence of adequate lubrication film.

¹ pressure ratings are dependent on the size of the extrusion gap.

surface quality

surface roughness	Rtmax [µm]	Ra [µm]
shaft	≤6,3	≤0,2-0,8
bottom of groove	≤25	≤1,6-6,3

tolerance recommendation

seal housing tolerances	
Ød	f8
ØD	H8
ØD1	H11